



★ (See note)

Esempio di ordinazione / Ordering example
Exemple de commande / Typenschlüssel

E = Evolution
H = Hitec®
F = Fine / Thin / Mince / Dünn
Delgado / Тонкий / Niewielki

EHF **50S** **N**

Modello
Modele
Modelo
Model

Type
Model
Модель

Ejemplo de pedido / Примерзаказа
Nomenklatura

N = Sbrinamento ad aria
Air defrost
Dégivrage a air
Luftabtauung
Air descongelación
Оттайка воздухом
Odszranianie powietrzem

E = Sbrinamento elettrico
Electric defrost
Dégivrage électrique
Elektrische Abtauung
Desescarche eléctrico
Электрическая оттайка
Odszranianie elektryczne



410 - 570 W





★ (See note)

5.5 mm Passo alette / Fin spacing				TC > 0 °C				
Modello	Type	EHF		50S	60S	70S	55D	65D
Potenza (R404)	Capacity (R404)	TC 2,5 °C ΔT1 10K	W	410	480	570	470	560
		TC 0 °C ΔT1 8 K	W	300	350	420	340	410
Portata d'aria	Air quantity		m³/h	190	210	280	240	265
Freccia d'aria	Air throw		m	3,1	3,4	2,9	2 x 2,0	2 x 2,2
Elettroventilatori	Fans		n°	1	1	2	2	2
Assorbimento motori	Motor power consumption	1~230 V 50 Hz	W	30	30	60	60	60
			A	0,24	0,24	0,48	0,48	0,48
Sbrinamento	Defrost	E 230 V	W	330	450	450	330	450
Dimensioni	Dimensions	A	mm	382	472	472	382	472
		B	mm	350	440	440	350	440
Attacchi entrata	Inlet connections		Ø mm	8	8	8	8	8
Volume circuito	Circuit volume		dm³	0,27	0,55	0,55	0,27	0,55
Superficie esterna	External surface		m²	1,30	1,65	1,65	1,30	1,65
Superficie interna	Internal surface		m²	0,16	0,20	0,20	0,16	0,20
Peso	Weight		kg	3,9	4,6	5,6	4,7	5,6

(+) Per altre condizioni vedere diagrammi (+) For other conditions see diagrams

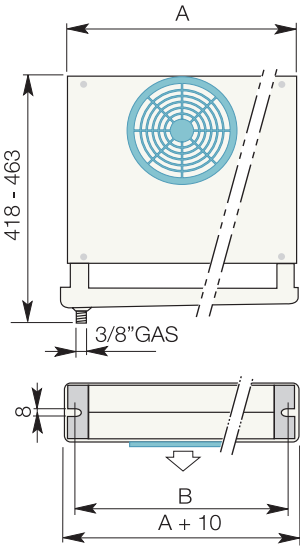

EHF...S
Flusso singolo
Single discharge
Simple flux
Einseitig ausblasend
Flujo único
Однопоточные
Jednostronny wyrzut

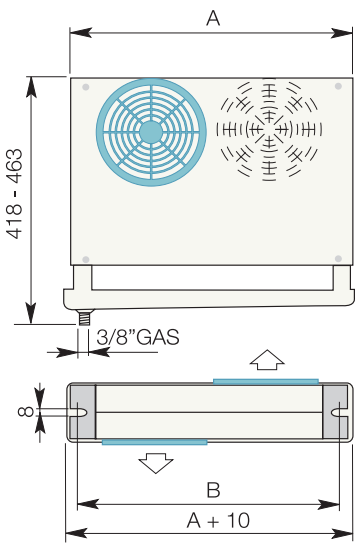

*** EHF...D**
Doppio flusso
Dual discharge
Double flux
Zweiseitig ausblasend
Doble flujo
Двухпоточные
Dwustronny wyrzut

Bacinella

La bacinella è smontabile per rendere reversibile la posizione del tubo di scarico.

Drain Tray

The drain tray supplied with each model is reversible to enable the drain connector to be placed in the best location for water drainage within the cabinet.

Egouttoir

L'égouttoir est mobile pour permettre l'inversion du tuyau d'écoulement.

Tropfwanne

Abnehmbare Tropfwanne zur Schwenkung des Ablaufrohrs.

Bandeja de goteo

La bandeja es extraíble para invertir la posición del tubo de descarga.

Поддон

Сливной поддон снимается, таким образом, положение сливной трубы может меняться.

Taca ociekowa

Taca jest zdejmowana, aby ułatwić odwrócenie rury odpływowej.